

180 L ENERGY STORAGE HOT WATER SYSTEM

REVOLUTIONISING HOT WATER

KEY BENEFITS

- Highly energy efficient
- Government incentives
- Generates hot water all year round
- Environmentally friendly
- Suitable for narrow areas
- Electronic user-friendly controller
- Further savings benefits with pre-existing solar power system

PRODUCT REVIEW 2021 AWARDS





AIR TO ENERGY

The iStore uses renewable energy to heat your water, without the need for solar panels.

It effectively absorbs the energy from the surrounding air and uses it to heat your water.

This technology makes the iStore extremely efficient and the most cost-effective way to generate hot water.

HOW IT WORKS

- 1. A fan draws in air containing heat energy, across the evaporator
- 2. The evaporator turns the liquid refrigerant into a gas
- 3. The compressor pressurises the refrigerant into a hot gas
- 4. The hot gas inside the condenser coil heats the water inside the coil-wrapped tank
- 5. The refrigerant reverts back to a liquid after heating the water and continues to the evaporator for the process to start again
- 6. The cycle continues until the set target temperature is achieved

evaporator

compressor

water outlet

inlet fan

tank

water inlet

coils





COMPARE THE COST SAVINGS



Some very cool features



Economical - The iStore boasts 4 intelligent operating modes adapting to all situations, including a hybrid mode for when additional guests are staying in your home and a vacation mode for when you are away on holidays



Optimal design - External wrap around heating coil provides maximum thermal energy transfer



Easy to install - The iStore is easy and quick to install



Low consumption - The iStore consumes approximately 0.5 kW of power during the air-to-energy process (average household running cycle is 3 - 4 hours = 1.5 to 2 kWh total)




Money & energy savings - For the average Australian household, heating water accounts for up to 30% of the total energy usage. The iStore saves you hundreds while saving the planet!





SPECIFICATIONS

Unit: mm

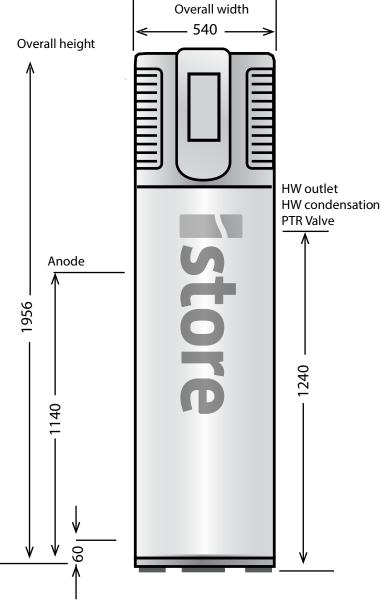

Cold water inlet

Dimensions


| Height | 1956 mm |
|------------------------|---------|
| Diameter | 540 mm |
| Height to water inlet | 60 mm |
| Height to water outlet | 1240 mm |
| Hot water condensation | |
| Height to PTR valve | |
| Height to anode | 1140 mm |
| Net weight (empty) | 93 kg |

Warranty Information

| Cylinder | 5 years |
|----------------------------|---------|
| Refrigeration & electrical | 2 years |

| Zone | 1 | 2 | 3 | 4 | 5 |
|--------------------|----|----|----|----|----|
| STCs | 25 | 26 | 30 | 32 | 31 |
| Energy Savings (%) | 73 | 74 | 72 | 70 | 73 |

Top View



HotWaterShop

